


Power tubes for ICP instruments now in stock!

List price \$1800----While supplies last our price is \$1600!

No Lead Times ----order will be shipped on the day it is placed!

The 3cx1500D3 has an input of 4.3 kW which is permissible up 110 MHz. Plentiful reserve emission is available from its 158 watt filament. Powerful characteristics as following:

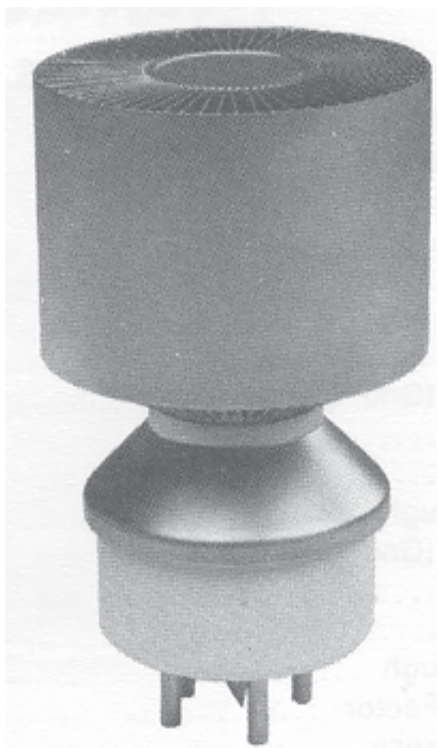

Characteristics	
Plate Dissipation (Max.)	1,500 Watts
Screen Dissipation (Max.)	---
Grid Dissipation (Max.)	75 Watts
Frequency for Max. rating (CW)	110 MHz
Amplification Factor	24
Filament/Cathode	Thoriated Tungsten
Voltage	6.3 Volts
Current	25.0 Amps
Capacitance	Grounded Cathode
Input	10.0 pf
Output	0.9 pf
Feedthrough	10 pf
Capacitance	---
Input	--- pf
Output	--- pf
Feedthrough	--- pf
Cooling	Forced Air
Base	---
Air Socket	SK-410
Air Chimney	SK-446
Boiler	---
Length	5.625 in; 14.29 cm
Diameter	3.42 in; 8.69 cm
Weight	3.2 lb ; 7.1 kg

Class of Operation	Type of Service	MAXIMUM RATINGS		TYPICAL OPERATION				
		Plate Voltage (Volts)	Plate Current (Amps)	Plate Voltage (Volts)	Screen Voltage (Volts)	Plate Current (Amps)	Drive Power (Watts)	Output Power (kiloWatts)
C	RF Industrial oscillator or amplifier	7,000	0.8	6,000	---	0.65	85	2.8

Contact CPI International to order or obtain more information:

CPI International-USA

5580 Skyline Blvd.

Santa Rosa, CA 95403

800-878-7654 Phone

707-545-79901 Fax

www.cpiinternational.com

sales@cpiinternational.com

CPI International- Europe

PO Box 2704

1000CS Amsterdam, The Netherlands

+31 20 638 05 97 phone

+31 20 420 28 36 Fax

www.cpiinternational.com

sales@cpiinternational.com